


# SPECIFICATION DATA

# HOT SPRING

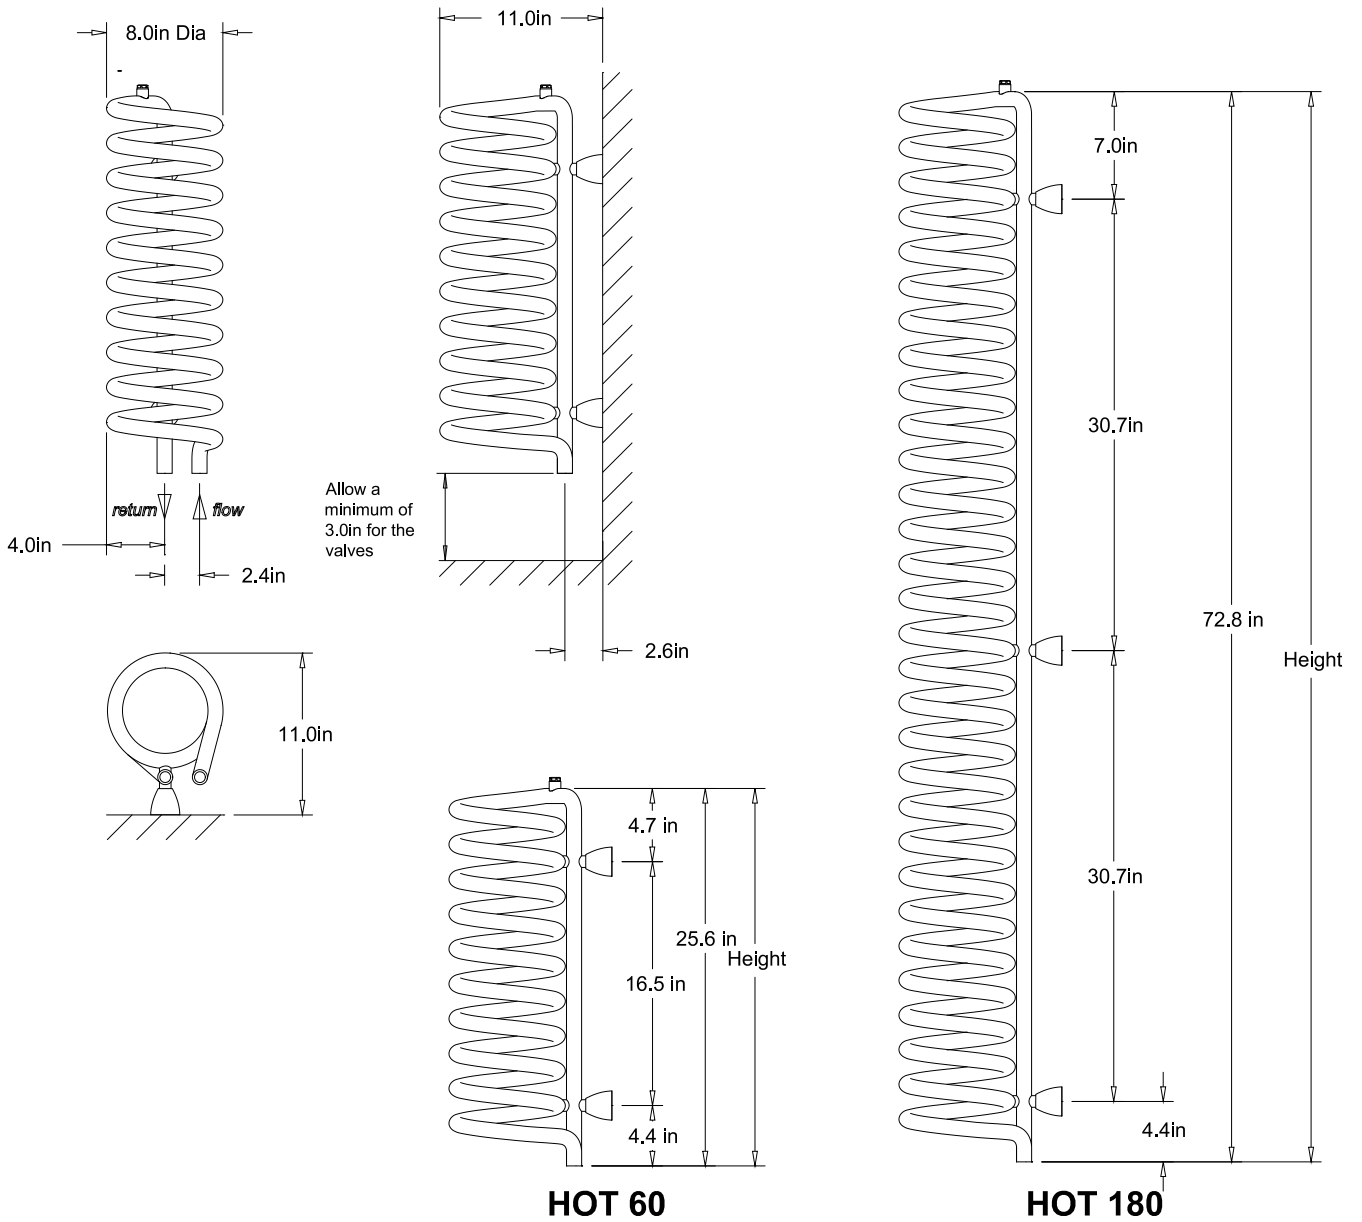

Test pressure: 174 P.S.I.  
 Max working pressure: 100 P.S.I.  
 Max working temperature : 200 °F

Connections: 1 / 2 inch **BSP** bottom tapings, angle valves (included) with 1 / 2 inch **NPT** female to pipe.  
 For closed loop hot water systems only.  
 Not for use with domestic hot water system.  
 This radiator may only be installed vertically as shown.

MODEL	HEIGHT	DEPTH	PIPE CENTERS	BRACKET CENTERS
HOT 60	25.6"±1	11.0"	2.4"	16.5"
HOT 180	72.8"	11.0"	2.4"	30.7" (twice)