


Model Type R3F BTUH/ft Ratings

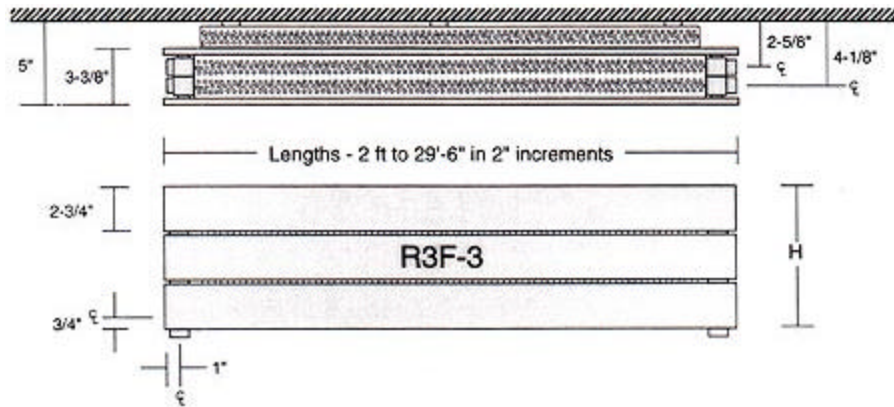

R3F-3 with Both Side & Vertical Connections - Shown for Example Only

Technical Data For All R3F Models Is Included Below

MODEL TYPE	HEIGHT H	BTUH/FT OUTPUT @ LISTED AWT & 65°F EAT									DRY WT lbs/ft
		215°F	190	180	170	160	150	140	130	120	
R3F-1	2-3/4"	1299	1020	914	812	713	616	523	434	349	4.3
R3F-2	5-3/4"	2014	1581	1418	1258	1105	955	811	673	541	8.0
R3F-3	8-5/8"	2572	2018	1810	1607	1411	1220	1036	860	691	11.7
R3F-4	11-1/2"	3082	2418	2169	1925	1690	1462	1241	1030	828	16.4
R3F-5	14-3/8"	3788	2973	2666	2367	2078	1797	1526	1266	1017	19.6
R3F-6	17-1/4"	4263	3345	3000	2663	2338	2022	1717	1425	1145	23.2
R3F-7	20-1/4"	4738	3718	3335	2960	2599	2247	1909	1584	1273	27.4
R3F-8	23-1/8"	5200	4080	3660	3248	2852	2466	2095	1738	1396	32.5
R3F-9	26-1/8"	5451	4278	3836	3405	2990	2585	2196	1822	1464	34.7
R3F-10	29"	5691	4466	4005	3556	3122	2699	2293	1902	1528	36.9

NOTE: Heat Outputs for various AWT's include 15% Heat Effect for placement along outside walls. Use the 215° F Output Rating with the Correction Factor for more specific design conditions. Medium Pressure increases Dry Weight by 10%, High Pressure increases Dry Weight by 15%