


Model Type R BTUH/ft Ratings

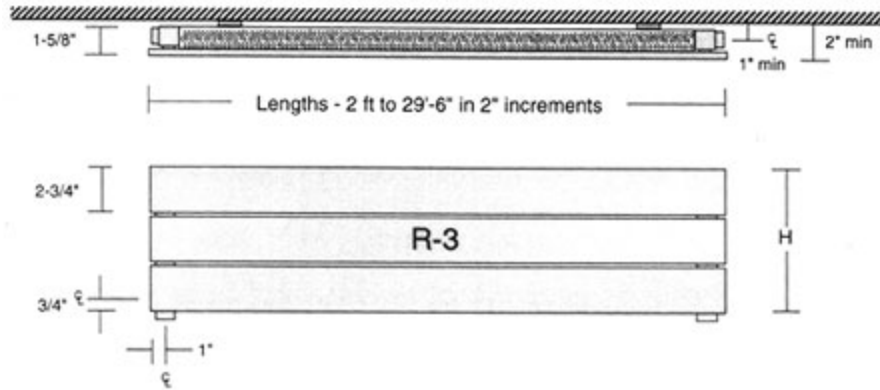

R-3 with Both Side & Vertical Connections - Shown for Example Only

Technical Data For All R Models Is Included Below

MODEL TYPE	HEIGHT H	BTUH/FT OUTPUT @ LISTED AWT & 65°F EAT										DRY WT lbs/ft
		215°F	190	180	170	160	150	140	130	120		
R-1	2-3/4"	231	181	162	144	127	109	93	77	62	1.3	
R-2	5-3/4"	416	326	292	260	228	197	167	139	112	2.4	
R-3	8-5/8"	615	483	433	384	337	292	248	206	165	3.5	
R-4	11-1/2"	811	636	571	507	445	385	327	271	218	4.6	
R-5	14-3/8"	1012	794	712	632	555	480	408	338	272	5.7	
R-6	17-1/4"	1219	956	858	761	668	578	491	407	327	6.8	
R-7	20-1/4"	1429	1122	1006	893	784	678	576	478	384	8.0	
R-8	23-1/8"	1638	1285	1153	1023	898	777	660	547	440	9.1	
R-9	26-1/8"	1846	1449	1300	1154	1013	876	744	617	496	10.2	
R-10	29"	2057	1614	1448	1285	1128	976	829	688	552	11.3	
R-11	31-7/8"	2266	1778	1595	1416	1243	1075	913	757	608	12.4	
R-12	34-7/8"	2474	1942	1741	1546	1357	1174	997	827	665	13.5	
R-13	37-3/4"	2685	2107	1890	1677	1473	1273	1082	898	721	14.6	
R-14	40-5/8"	2894	2271	2037	1808	1587	1372	1166	967	777	15.7	
R-15	43-5/8"	3102	2435	2183	1938	1702	1471	1250	1037	833	16.8	
R-16	46-1/6"	3311	2598	2330	2069	1816	1570	1334	1107	889	17.9	
R-17	49-3/8"	3520	2762	2477	2199	1931	1669	1418	1177	945	19.0	
R-18	52-3/8"	3728	2926	2624	2329	2045	1768	1502	1246	1001	20.1	
R-19	55-1/4"	3937	3089	2771	2459	2160	1867	1586	1316	1057	21.3	
R-20	58-1/8"	4143	3252	2916	2589	2273	1965	1669	1385	113	22.4	
R-21	61"	4352	3415	3063	2719	2387	2064	1753	1455	1169	23.5	
R-22	64"	4559	3578	3209	2848	2501	2162	1837	1524	1224	24.6	
R-23	66-7/8"	4768	3741	3356	2979	2615	2261	1921	1594	1280	25.7	
R-24	69-3/4"	4969	3899	3497	3104	2726	2357	2002	1661	1335	26.8	

NOTE: Heat Outputs for various AWT's include 15% Heat Effect for placement along outside walls. Use the 215° F Output Rating with the Correction Factor for more specific design conditions. Medium Pressure increases Dry Weight by 10%, High Pressure increases Dry Weight by 15%