


## Model Type RC BTUH/ft Ratings

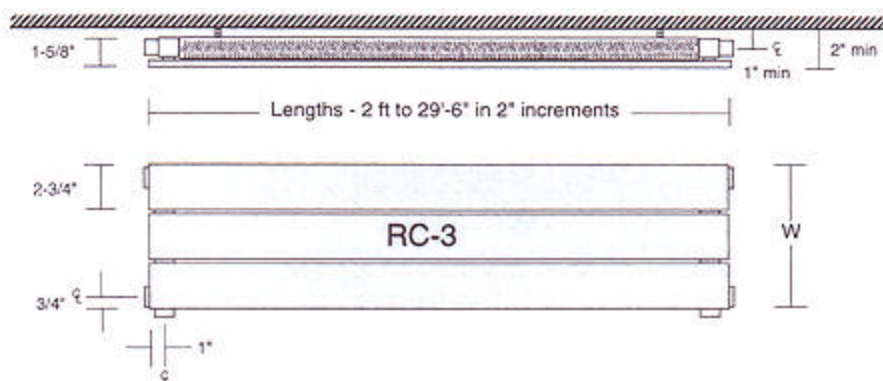

RC-3 with Both Side & Vertical Connections - Shown for Example Only

### Technical Data For All RC Models Is Included Below

MODEL TYPE	HEIGHT H	BTUH/FT OUTPUT @ LISTED AWT & 65°F EAT									DRY WT lbs/ft
		215°F	190	180	170	160	150	140	130	120	
RC-1	2-3/4"	144	113	101	90	79	68	58	48	39	1.3
RC-2	5-3/4"	271	213	191	169	149	1219	109	91	73	2.4
RC-3	8-5/8"	401	315	282	250	220	190	162	134	108	3.5
RC-4	11-1/2"	528	415	372	330	290	251	213	177	142	4.6
RC-5	14-3/8"	659	517	464	412	362	313	266	220	177	5.7
RC-6	17-1/4"	795	624	559	496	436	377	320	266	213	6.8
RC-7	20-1/4"	932	731	656	582	511	442	375	311	250	8.0
RC-8	23-1/8"	1067	837	751	667	585	506	430	357	287	9.1
RC-9	26-1/8"	1203	944	847	752	660	571	485	402	323	10.2
RC-10	29"	1340	1052	943	837	735	636	540	448	360	11.3
RC-11	31-7/8"	1477	1159	1039	923	810	700	595	494	397	12.4
RC-12	34-7/8"	1613	1266	1135	1008	885	765	650	539	433	13.5
RC-13	37-3/4"	1750	1373	1232	1093	960	830	705	585	470	14.6
RC-14	40-5/8"	1886	1480	1327	1178	1035	895	760	631	507	15.7
RC-15	43-5/8"	2022	1586	1423	1263	1109	959	814	676	543	16.8
RC-16	46-1/2"	2158	1693	1519	1348	1184	1023	869	721	580	17.9
RC-17	49-3/8"	2293	1800	1614	1433	1258	1088	924	767	616	19.0
RC-18	52-3/8"	2429	1907	1710	1518	1333	1152	979	812	653	20.1
RC-19	55-1/4"	2566	2013	1806	1603	1408	1217	1034	858	689	21.3
RC-20	58-1/8"	2700	2119	1901	1687	1481	1281	1088	903	725	22.4
RC-21	61"	2837	2226	1996	1772	1556	1345	1143	948	762	23.5
RC-22	64"	2971	2332	2091	1856	1630	1409	1197	993	798	24.6
RC-23	66-7/8"	3107	2438	2187	1941	1704	1474	1252	1039	834	25.7
RC-24	69-3/4"	3238	2541	2279	2023	1776	1536	1305	1083	870	26.8

**NOTE:** Heat Outputs for various AWT's include 15% Heat Effect for placement along outside walls. Use the 215° F Output Rating with the Correction Factor for more specific design conditions. Medium Pressure increases Dry Weight by 10%, High Pressure increases Dry Weight by 15%