


Model Type RV BTUH/ft Ratings

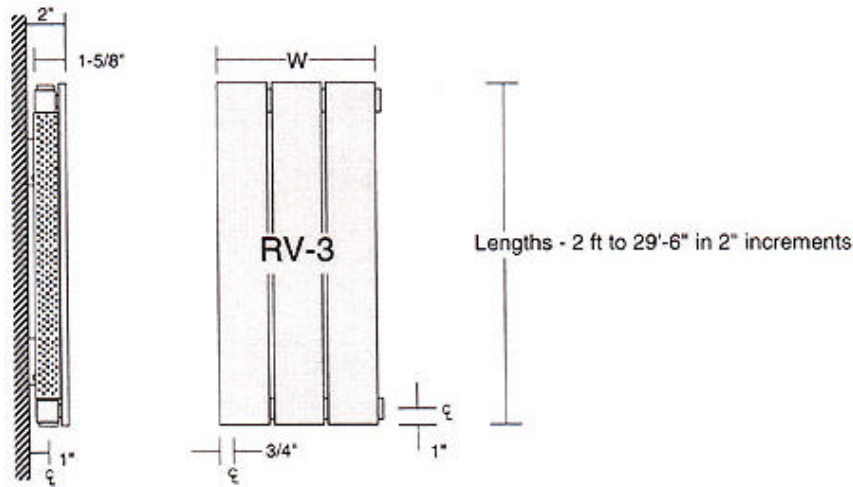

RV-3 with Both Side & Vertical Connections - Shown for Example Only

Technical Data For All RV Models Is Included Below

MODEL TYPE	WIDTH W	BTUH/FT OUTPUT @ LISTED AWT & 65°F EAT									DRY WT lbs/ft
		215°F	190	180	170	160	150	140	130	120	
RV-1	2-3/4"	200	157	141	125	110	95	80	67	54	1.3
RV-2	5-3/4"	399	313	281	249	219	189	161	133	107	2.4
RV-3	8-5/8"	599	470	421	374	329	284	241	200	161	3.5
RV-4	11-1/2"	798	627	562	499	438	379	322	267	214	4.6
RV-5	14-3/8"	998	783	702	624	548	473	402	334	268	5.7
RV-6	17-1/4"	1198	940	843	748	657	568	483	400	322	6.8
RV-7	20-1/4"	1397	1097	983	873	767	663	563	467	375	8.0
RV-8	23-1/8"	1597	1253	1124	998	876	757	643	534	429	9.1
RV-9	26-1/8"	1796	1410	1264	1122	986	852	724	601	483	10.2
RV-10	29"	1996	1566	1405	1247	1095	947	808	667	536	11.3
RV-11	31-7/8"	2196	1723	1545	1372	1204	1041	885	734	590	12.4
RV-12	34-7/8"	2395	1880	1686	1496	1314	1136	965	801	643	13.5
RV-13	37-3/4"	2595	2036	1826	1621	1423	1231	1045	867	697	14.6
RV-14	40-5/8"	2794	2193	1967	1746	1533	1325	1126	934	751	15.7
RV-15	43-5/8"	2994	2350	2107	1871	1642	1420	1206	1001	804	16.8
RV-16	46-1/2"	3194	2506	2248	1995	1752	1515	1287	1068	858	17.9
RV-17	49-3/8"	3393	2663	2388	2120	1861	1609	1367	1134	911	19.0
RV-18	52-3/8"	3593	2820	2529	2245	1971	1704	1447	1201	965	20.1
RV-19	55-1/4"	3792	2976	2669	2369	2080	1799	1528	1268	1019	21.3
RV-20	58-1/8"	3992	3133	2810	2494	2190	1893	1608	1335	1072	22.4
RV-21	61"	4192	3289	2950	2619	2299	1988	1689	1401	1126	23.5
RV-22	64"	4391	3446	3091	2744	2409	2083	1769	1468	1179	24.6
RV-23	66-7/8"	4591	3603	3231	2868	2518	2177	1849	1535	1233	25.7
RV-24	69-3/4"	4790	3759	3372	2993	2628	2272	1930	1601	1287	26.8

NOTE: Heat Outputs for various AWT's include 15% Heat Effect for placement along outside walls. Use the 215° F Output Rating with the Correction Factor for more specific design conditions. Medium Pressure increases Dry Weight by 10%, High Pressure increases Dry Weight by 15%