


Model Type UFLT

BTUH/ft Ratings

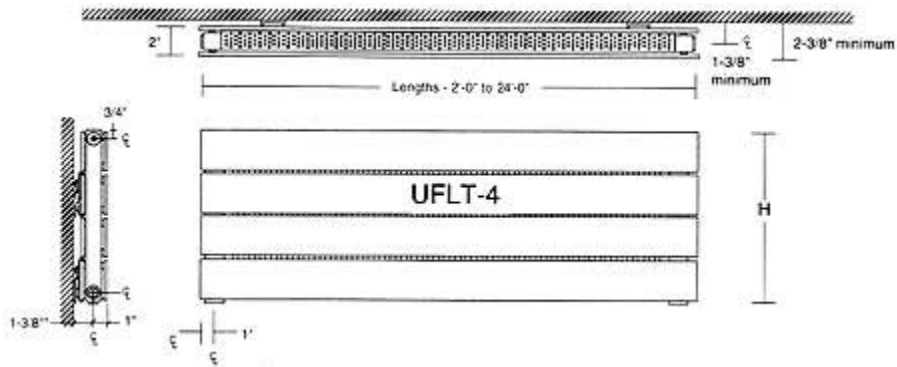

Technical Data For All UFLT Models Is Included Below

MODEL TYPE	HEIGHT H	BTUH/FT OUTPUT @ LISTED AWT & 65°F EAT									DRY WT lbs/ft
		215°F	190	180	170	160	150	140	130	120	
UFLT-2	5-3/4"	867	680	610	542	476	411	349	290	233	5.6
UFLT-3	8-5/8"	1118	878	787	699	613	530	451	374	300	8.6
UFLT-4	11-1/2"	1351	1060	951	844	741	641	544	452	363	11.7
UFLT-5	14-3/8"	1718	1348	1209	1073	942	815	692	574	461	15.6

NOTE: Heat Outputs for various AWT's include 15% Heat Effect for placement along outside walls. Use the 215° F Output Rating with the Correction Factor for more specific design conditions. Medium Pressure increases Dry Weight by 10%, High Pressure increases Dry Weight by 15%.