


Model Type RS2

BTUH/ft Ratings

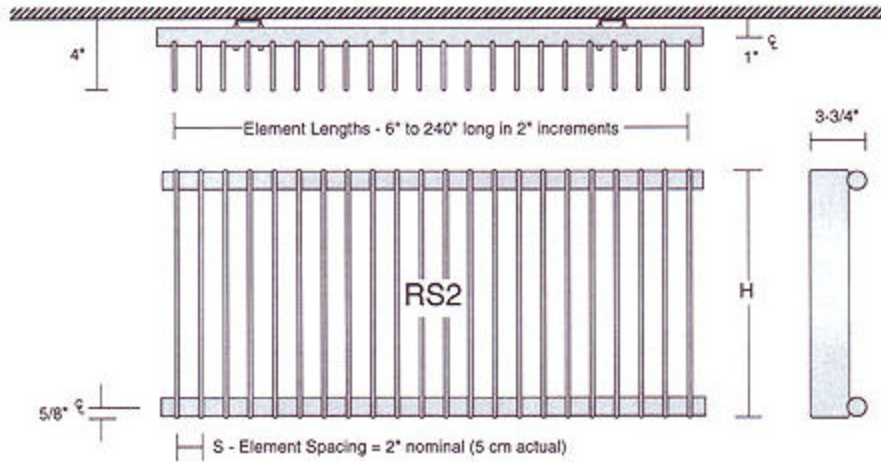

MODEL TYPE	HEIGHT H	BTUH/FT OUTPUT @ LISTED AWT & 65°F EAT									DRY WT lbs/ft
		215°F	190	180	170	160	150	140	130	120	
RS2-16	15-7/8"	1380	1083	960	863	758	654	540	461	371	9.8
RS2-24	23-5/8"	1920	1507	1320	1200	1054	910	780	641	516	13.4
RS2-30	29-1/2"	2280	1790	1620	1425	1252	1081	900	762	613	16.1
RS2-36	35-5/8"	2640	2072	1860	1650	1450	1251	1080	882	710	18.8
RS2-78	78-3/4"	6300	4946	4380	3938	3459	2989	2520	2104	1695	38.6
RS2-84	84-5/8"	6780	5322	4740	4238	3722	3214	2700	2265	1824	40.5

NOTE: Heat Outputs for various AWT's include 15% Heat Effect for placement along outside walls. Use the 215° F Output Rating with the Correction Factor for more specific design conditions.